

CISCO 350-601

QUESTIONS AND ANSWERS

FREE VERSION

(LIMITED CONTENT)

Thank you for downloading our reliable exam questions for more exams you can visit: <u>https://www.pass4it.com/all-vendors</u> Dumps Questions 350-601

Exam Name: Implementing Cisco Data Center Core Technologies (DCCOR)

Certification Provider: Cisco

Exam: Implementing Cisco Data Center Core Technologies (DCCOR)

Question #1

DRAG DROP -

An engineer is implementing NetFlow on a Cisco Nexus 7000 Series Switch.

Drag and drop the NetFlow commands from the left into the correct order they must be entered on the right.

Select and Place:

N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input</interface>	Step 1		
N7K-1(config)# feature netflow	Step 2		
N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor	Step 3		
N7K-1(config)# flow monitor NetflowMonitor	Step 4		

Correct

Answer:

N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input</interface>	N7K-1(config)# feature netflow		
N7K-1(config)# feature netflow	N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor		
N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor	N7K-1(config)# flow monitor NetflowMonitor		
N7K-1(config)# flow monitor NetflowMonitor	N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input</interface>		

Reference:

https://www.cisco.com/c/en/us/support/docs/switches/nexus-7000-series-switches/112213-netflow-nexus7000-nsox-configex.html

Question #2

Which virtual MAC address is the default for HSRP version 2 group 10?

A. 0000.5E00.0110

B. 0000.0C9F.F00A

C. 3716.1350.1C0A


D. 0000.0C9F.F010

Correct Answer: B

Question #3

Refer to the exhibit.

1	•			1.2	
	н	u	١c	Ŧ.	
	ι.	LV.	10	n	

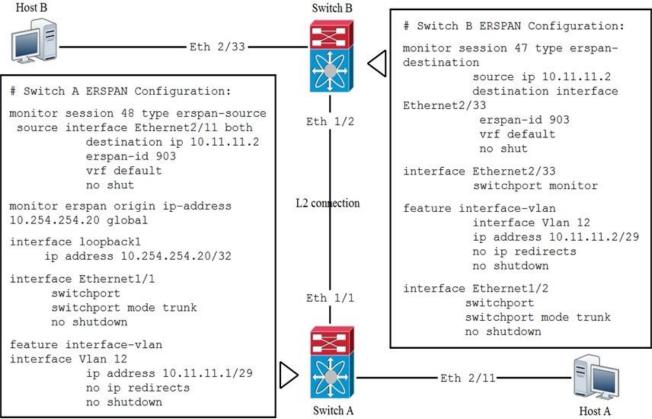

Which statement about the ERSPAN configuration in this environment is true?

A. The session number of the source of ERSPAN spanned traffic must have a session ID of 47 for the traffic analyzer to receive the traffic.

B. Host B is the source of ERSPAN spanned traffic and host A is the traffic analyzer.

C. The session number of the source of ERSPAN spanned traffic must have a session ID of 48 for the traffic analyzer to receive the traffic.

D. Host A is the source of ERSPAN spanned traffic and host B is the traffic analyzer.

Correct Answer: D

Question #4

Refer to the exhibit.

ACI-Leaf1# show ip route vrf DATACENTER:DC 10.20.1.0/24, ubest/mbest: 1/0, attached, direct, pervasive *via 10.0.8.65%overlay-1, [1/0], 4w3d, static 172.16.100.0/24, ubest/mbest: 1/0 *via 10.1.168.95%overlay-1, [200/5], 3wod, bgp-132, internal, tag 132 (mpls-vpn) 172.16.99.0/24, ubest/mbest: 1/0 *via 10.0.1.14, [20/0], 3wod, bgp-132, external, tag 200

Which two statements about the routing table of the leaf switch are true? (Choose two.)

A. 10.20.1.0/24 is a BD subnet in ACI.

B. The next hop 10.0.1.14 for route 172.16.99.0/24 is the TEP address of a border leaf in ACI.

C. 172.16.100.0/24 is a BD subnet in ACI.

D. The next hop 10.1.168.95 for route 172.16.100.0/24 is the TEP address of a border leaf in ACI.

E. The next hop 10.0.8.65 for route 10.20.1.0/24 is the TEP address of a border leaf in ACI.

Correct Answer: AE

Question #5

Which mroute state is created when Bidirectional PIM is deployed at a site?

A. *.G

B. MVPN Type-6

C. MVPN Type-7

D. S.G

Correct Answer: A